

[atriadesigns.ca](http://atriadesigns.ca)



premier outdoor living • solar shading • cladding products

(604) 428 1818  
[sales@atriadesigns.ca](mailto:sales@atriadesigns.ca)

FORTANO®

The windproof side-mast parasol



Glatz \*

## Assortment

	Nominal size without flounce	Number of ribs	Order no. Frame anodised natural	Order no. Frame anthracite
<input type="checkbox"/>	cm 300x300	8 parts	094 00 310 171	094 00 310 301
<input checked="" type="checkbox"/>	400x300	8 parts	094 00 402 171	094 00 402 301

Nominal size	Lateral distance	Pole Ø	Area covered	Crank handle height	Height closed	Clear headroom	Total height/ open	Height of pole	Overhang at the back	Length of free-arm	Foundation	Minimum weight for base	max. wind speed open	perm.
cm	cm	cm	m <sup>2</sup>	cm	cm	cm	cm	cm	cm	cm	cm	kg	km/h (wind force)	
A	AS	M <sup>1</sup>	B	D	E	F	G <sup>1</sup> /G <sup>2</sup>	M <sup>2</sup>	N	Z	C			
300x300	-	6.6x9.5	9	106	105	215	320/270	265	12	175	60x60	180	55 (7)	
400x300	-	6.6x9.5	12	106	65	215	320/270	265	12	175	60x60	180	45 (6)	


The listed measures represent extrapolated average values that may be slightly different on the product ( $\pm 2\% \pm 5\text{ cm}$ ).

The height dimensions are based on the ground socket M4. With the base M4, 120 kg these vary by plus 11.5 cm and with the base M4, 180 kg by plus 15.5 cm.

The lowest height for opening/closing is 5 cm below the closing height.

The max. wind speed limits as per our separate sheet apply only if the parasol canopy is in a horizontal position and if there is a fix ground anchorage. A base with the specified minimum weight is not sufficient.

In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.

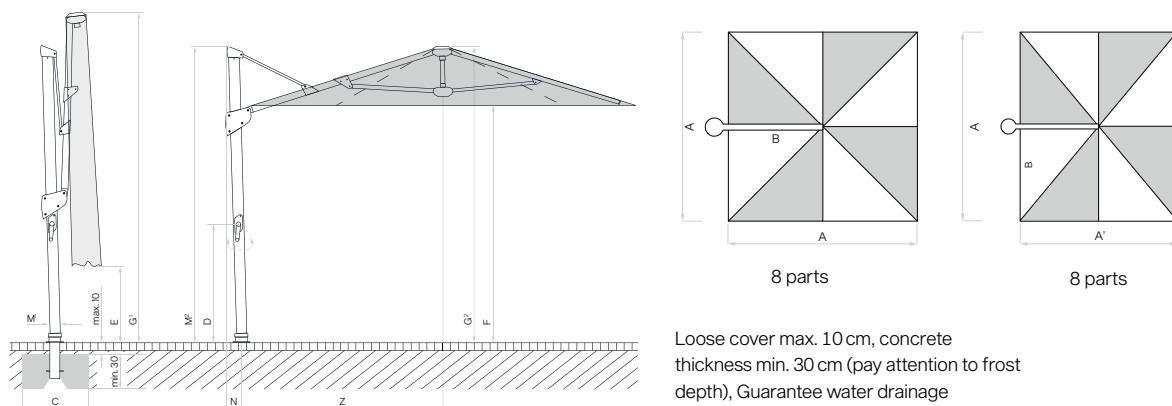

## Accessories

Absolutely  
necessary

Order no.

### Protective cover made of coated, tear-resistant polyester fabric

1	Protective cover with zip and rod for 300x300 and 400x300 cm	350 01 221 502
---	--	----------------

### Electrical accessories

2	OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger	350 01 563 000
3	OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger	350 01 563 100




## Fixations

	Absolutely necessary	Order no.
<b>Ground sockets</b>		
4	Ground socket M4, hot-dip galvanised steel	Pedestal M4 / turnable base M4 350 01 226 510
<b>Mounting plates</b>		
5	Mounting plate M4/M8, 30×30×1.5 cm, hot-dip galvanised steel	Pedestal M4 / turnable base M4 350 01 226 921
6	Mounting plate M4 special, for installation height 50–149 mm, hot-dip galvanised steel	Pedestal M4 / turnable base M4 350 01 226 932
7	Mounting plate M4 special, for installation height 150–350 mm, hot-dip galvanised steel	Pedestal M4 / turnable base M4 350 01 226 930
8	Mounting plate M4 for high insulation (50–350 mm), installation height (50–350 mm) made to measure (higher on request), hot-dip galvanised steel <b>NEW</b>	Pedestal M4 / turnable base M4 350 01 222 510
<b>Wall consoles</b>		
9	Wall console M4, extension 480 mm, hot-dip galvanised steel	Pedestal M4 / turnable base M4 350 01 229 405
10	Wall console M4, extension 100 mm, hot-dip galvanised steel	Pedestal M4 / turnable base M4 350 01 229 410
<b>Bases</b>		
11	Base frame M4, 180 kg, (for 12 plates 40×40×4 cm), 91×91×15.5–19.5 cm, hot-dip galvanised steel, adjustable and levellable (price without plates)	Pedestal M4 / turnable base M4 350 01 108 335
	Slab set, 12 pieces, 40×40×4 cm, (approx. 165 kg), concrete	350 01 226 907
	Slab set, 12 pieces, 40×40×4 cm, (approx. 170 kg), 8 pieces concrete, 4 pieces in granite-look	350 01 226 906
12	Cover for M4 base 180 kg, 96×96×15 cm, plastic ABS coated, anodised aluminium look	350 01 100 717
13	Cover for M4 base 180 kg, 96×96×15 cm, plastic ABS coated, anthracite	350 01 100 730
14	<sup>3,6</sup> Set of castors for base M4 120 kg / 180 kg, (maximum weight 240 kg), Ø 5 cm, H = 5.5 cm, galvanised steel	350 01 100 500
<b>Bases with castors</b>		
15	<sup>3,7</sup> Base frame with castors M4, 180 kg, 94×94×14.6 cm, hot-dip galvanised steel, white RAL 9016, frame approx. 30 kg (without decorative plate)	Weight Set + Pedestal / turnable base M4 + Decorative plate 350 01 113 810
16	<sup>3,7</sup> Base frame with castors M4, 180 kg, 94×94×14.6 cm, hot-dip galvanised steel, anthracite RAL 7016, frame approx. 30 kg (without decorative plate)	Weight Set + Pedestal / turnable base M4 + Decorative plate 350 01 113 820
	Weight Set for base with castors M4, 180 kg, 4 pieces, concrete, (Weight Set approx. 150 kg)	350 01 110 800
17	Decorative plate in grey white RAL 9002 for base with castors M4, 180 kg, aluminium composite	350 01 113 910
18	Decorative plate in anthracite RAL 7016 for base with castors M4, 180 kg, aluminium composite	350 01 113 920
<b>Pedestals/turnable bases</b>		
19	Pedestal M4 for Fortano, galvanised steel, anthracite	350 01 220 960
20	Turnable base M4 for Fortano, galvanised steel, anthracite	350 01 220 970
19	Pedestal M4 for Fortano, galvanised steel, graphite grey	350 01 220 940
20	Turnable base M4 for Fortano, galvanised steel, graphite grey	350 01 220 950

<sup>3</sup> only suitable for smooth, joint free surface coverings

<sup>6</sup> Not suitable for cover for M4 base

<sup>7</sup> 180 kg: Ground clearance 13 mm

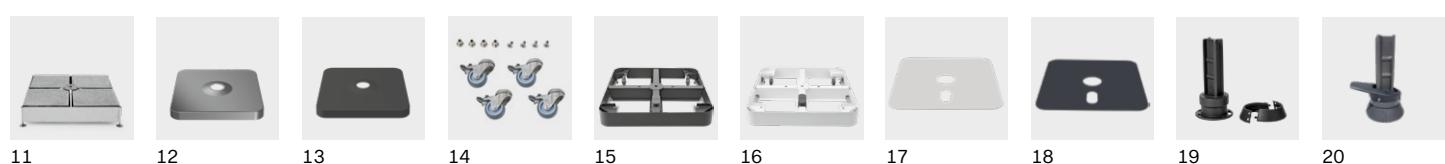


**Frame**

8 parts  
 Mast profile oval 66 x 95 x 3 mm  
 Crank drive for opening and closing  
 Closable over covered tables (65–105 cm)  
 Opposite opening principle for particularly high closing height  
 Synchronous opening principle  
 Optionally with turnable base for 360° rotation  
 Canopy self-tensing through flexible rib ends  
 Frame roof: square, rectangular

**Frame colour**

Aluminium, anodised or anthracite powder-coated (RAL 7016)

**Canopy**

Fabric Quality 5: polyacrylic, 300 g/m<sup>2</sup>, UV protection > 98%  
 Fabric Quality 4: polyester, 250 g/m<sup>2</sup>, UV protection > 98%  
 Fabric Quality 2: polyester, 220 g/m<sup>2</sup>, UV protection > 98%,  
 (only in anthracite frame)

**Flounce**

Only available without

**Protective cover**

Included in delivery

**Electrical accessories**

Osyrian Spot LED with integrated battery pack



Usage locations



Type of fastening



FORTANO®,  
 Int. Patents reg.

Valid from 1.1.2025  
[glatz.com](http://glatz.com)