

atriadesigns.ca



premier outdoor living • solar shading • cladding products

(604) 428 1818
sales@atriadesigns.ca

Giant parasols

PALAZZO® Line

The Palazzo giant parasol range with the models Style, Noblesse and Royal is more in demand than ever in the contract sector. All three models are ideal for large outdoor areas, ensure a modern aesthetic with their flat parasol roof, withstand wind speeds of up to 115 km/h and provide reliable protection from the sun and rain.

The patented opening principle of the Palazzo line is absolutely unique. With only 9 to 19 turns of the crank depending on size, the three models can be opened in no time at all. Motorised parasols are also available for those who prefer to open their parasols as if by magic.

The LED lighting system is directly and indirectly integrated into the ribs and can be controlled via an intuitive remote control.

There are no limits for shape and size. Depending on the location, special sizes are available tailored in five-centimetre increments. The Palazzo range stands out through its distinctive design and intrinsic values.

PZN

PALAZZO® Noblesse
The giant parasol for the ambitious



Unique selling proposition

- Palazzo line design language: uniform design of the models Royal, Noblesse and Style
- Continuous mast profile down to the floor covering (internal support tube & tip-over hinge)
- Counter-rotating opening principle (with crank or motor):
Opened with just 12 turns of the crank (patented)
High closing height (no need to move the furniture)
- 95 km/h wind stability at size 400 x 400 cm
- Top quality material selection
- LED lighting system integrated into the struts
- Professional additional options (Heating, rain gutters, ...)
- Special product solutions (Sizes, frame, fabrics, ...)

Places of use

- Large area outdoors
- Terraces & rooftops
- Public spaces & parks
- Corrosive environments

Glatz *

Basic model

Frame

- 8, 10 or 12 parts made from anodised aluminium
- Anti-rotation mast including reinforcing struts
- Mast profile Ø 105 mm and 4.5 mm wall thickness
- Roof struts 23 x 50 mm / 23 x 40 mm

Frame material

- Aluminium: EN-AW-6063-T66
- Screws and rivets made from stainless steel A4
- Glass-fibre reinforced plastic parts: PA6GF30
- Anodisation:
 - Profile surface finishing
 - High degree of hardness – wear resistance (“scratch-resistant”)
 - Increased corrosion resistance
 - Natural appearance (adaptation to environment)
 - Modern look (luxurious matt)

Frame colour

- Anodised natural matt (standard)
- RAL 7016 powder-coated (no surcharge)
- RAL colours powder-coated (surcharge)
 - Powder coating on anodised profiles (providing additional corrosion protection)

Opening principle

- Counter-rotating (telescopic system)
- Patented opening using a toothed belt
- Opened with just 12 turns of the crank

Drive

- With hand crank (detachable)
- With motor (surcharge)

Canopy

- With or without flounce
- Adjustable (adjustable strut extensions)
- 100 % polyacrylic approx. 300 g/m² (spun dyed)
- Replaceable or interchangeable canopies

Wind stability

- Up to 95 km/h (with fixed anchorage)
- Tested in a wind tunnel

Fixations

[More information](#)

- Bases / parasol stands / covers
- Ground sockets
- Mounting plates without or with installation height made to measure
- Mounting plates for insulation floors
- Base plates made to measure

Additional options –
Standard accessories


[More information](#)

- LED lighting system (RGBW)
- Infrared radiant heater
- Motorisation
- BUS systems / connection to the home control system
- Rain gutters
- Side walls
- Protective covers with corset lacing
- Strap systems
- Impact protection
- Anti-theft system (integrated)

Special product solutions –
Made to measure


[More information](#)

- Special sizes & intermediate measurements (increments 1, 2 & 3)
- Mast extensions & reductions max. + 1000 mm / - 500 mm
- Frame in all RAL colours
- Glatz Green® Special fabric
- Special fabrics (third-party fabrics, PVC & flame retardant)
- Custom flounces & edging strips
- Printing & advertising print

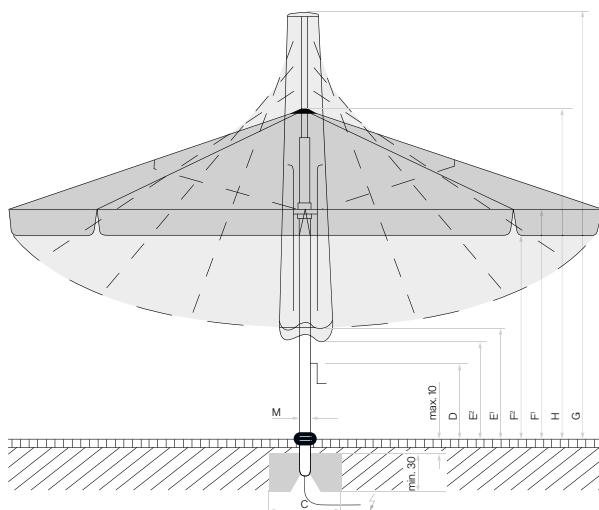

LED positions on the
Palazzo Noblesse with LED

Radiant heater positions on the
Palazzo Noblesse with radiant heater

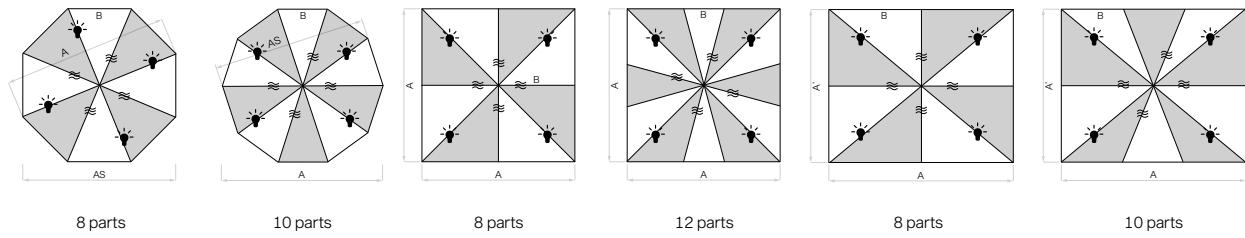

Nominal size	Lateral distance	Mast Ø	Area covered	Crank height	Height closed/ with flounce	Clear headroom/ with flounce	Total height	Height open	Foundation	Minimum weight for base	¹⁰ max. wind speed open perm.
cm	cm	cm	m ²	cm	cm	cm	cm	cm	cm	kg	km/h (wind force)
A	AS	M	B	D	E'/E ²	F'/F ²	G	H	C		
Ø 450 ⁶	416	10.5	14.3	85	167/142	235/210	396	299	100×100	240	85 (9)
Ø 500 ⁶	462	10.5	17.7	85	169/144	235/210	424	305	100×100	240	75 (9)
Ø 600 ⁷	571	10.5	25.5	85	141/116	235/210	447	318	125×125	430	80 (9)
Ø 700 ⁷	665	10.5	36.8	85	103/78	235/210	460	331	135×135	570	70 (8)
400×400 ⁶	-	10.5	16	85	121/96	235/210	404	294	100×100	310	95 (10)
450×450 ⁶	-	10.5	20.3	85	98/73	235/210	417	300	120×120	430	80 (9)
500×500 ⁶	-	10.5	25	75	84/59	235/210	439	307	120×120	430	70 (8)
500×500 ⁸	-	10.5	25	75	84/59	235/210	439	307	125×125	430	85 (9)
550×550 ⁸	-	10.5	30.3	65	80/55	235/210	472	318	125×125	570	75 (9)
600×600 ⁸	-	10.5	36	65	81/56	235/210	512	344	135×135	570	65 (8)
450×350 ⁶	-	10.5	15.8	80	112/87	235/210	397	294	100×100	240	85 (9)
500×250 ⁶	-	10.5	12.5	85	91/66	235/210	374	310	100×100	240	90 (10)
500×400 ⁶	-	10.5	20	80	101/76	235/210	422	301	100×100	310	70 (8)
550×450 ⁷	-	10.5	24.8	75	85/60	235/210	442	308	120×120	430	75 (9)
600×300 ⁷	-	10.5	18	85	81/56	235/210	418	307	100×100	310	80 (9)
600×400 ⁷	-	10.5	24	75	81/56	235/210	443	309	135×135	430	75 (9)
600×500 ⁷	-	10.5	30	65	82/57	235/210	476	321	135×135	430	70 (8)

⁶ 8 parts, ⁷ 10 parts, ⁸ 12 parts, ¹⁰ 10 km/h less with flounce

The above measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5\text{ cm}$).

If a minimum or a maximum height underneath is required, this must be agreed with Glatz.

The measures of the height are determined by the M4 / M8 ground socket. If one of the offered bases is used, these measures change only slightly.

The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage. A base with the specified minimum weight is not sufficient.

In the presence of several parasols, the min. distance between one parasol and another and between parasols and walls shall be 25 cm.

Opening and closing using a battery-operated drill is not permitted.



Glatz AG

+41 52 723 66 44
contract@glatz.com
glatz.com



PZR

PALAZZO® Royal
A Swiss masterpiece



Unique selling proposition

- Palazzo line design language: uniform design of the models Royal, Noblesse and Style
- Continuous mast profile down to the floor covering (internal tip-over hinge)
- Counter-rotating opening principle (with crank or motor):
Opened with just 19 turns of the crank (patented)
High closing height (no need to move the furniture)
- 110 km/h wind stability at size 500 x 500 cm
- Top quality material selection
- LED lighting system integrated into the struts
- Professional additional options (Heating, rain gutters, ...)
- Special product solutions (Sizes, frame, fabrics, ...)

Places of use

- Large area outdoors
- Terraces & rooftops
- Corrosive environments

Glatz *

Basic model

Frame

- 10, 12 or 14 parts made from anodised aluminium
- Anti-rotation mast including reinforcing struts
- Mast profile Ø 120 mm and 5.5 mm wall thickness
- Roof struts 30 x 55 mm

Frame material

- Aluminium: EN-AW-6063-T66
- Screws and rivets made from stainless steel A4
- Glass-fibre reinforced plastic parts: PA6GF30
- Anodisation:
 - Profile surface finishing
 - High degree of hardness – wear resistance (“scratch-resistant”)
 - Increased corrosion resistance
 - Natural appearance (adaptation to environment)
 - Modern look (luxurious matt)

Frame colour

- Anodised natural matt (standard)
- RAL 7016 powder-coated (no surcharge)
- RAL colours powder-coated (surcharge)
 - Powder coating on anodised profiles providing additional corrosion protection)

Opening principle

- Counter-rotating (telescopic system)
- Patented opening using a toothed belt
- Opened with just 19 turns of the crank

Drive

- With hand crank (detachable)
- With motor (surcharge)

Canopy

- With or without flounce
- 100 % polyacrylic approx. 300 g/m² (spun dyed)
- Replaceable or interchangeable canopies

Wind stability

- Up to 110 km/h (with fixed anchorage)
- Tested in a wind tunnel

Important

- The parasol is delivered as an assembly kit and must be assembled on site

Fixations

[More information](#)

- Bases / parasol stands / covers
- Ground sockets
- Mounting plates without or with installation height made to measure
- Mounting plates for insulation floors
- Base plates made to measure

Additional options –
Standard accessories


[More information](#)

- LED lighting system (RGBW)
- Infrared radiant heater
- Motorisation
- BUS systems / connection to the home control system
- Rain gutters
- Side walls
- Protective covers with corset lacing
- Strap systems
- Impact protection
- Anti-theft system (integrated)

Special product solutions –
Made to measure

[More information](#)


- Special sizes & intermediate measurements (increments 1, 2 & 3)
- Mast extensions & reductions max. + 1000 mm / - 450 mm
- Frame in all RAL colours
- Glatz Green® Special fabric
- Special fabrics (third-party fabrics, PVC & flame retardant)
- Custom flounces & edging strips
- Printing & advertising print

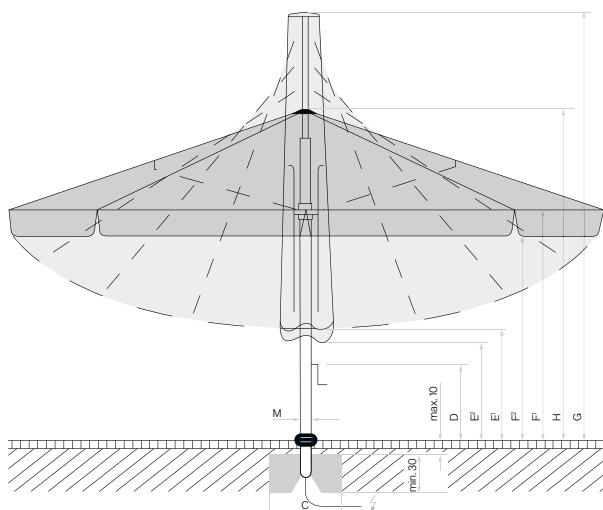

Loose cover max. 10 cm, concrete thickness min. 30 cm (pay attention to frost depth), guarantee water drainage, supply line electric.

LED positions on the Palazzo Royal with LED

Radiant heater positions on the Palazzo Royal with radiant heater

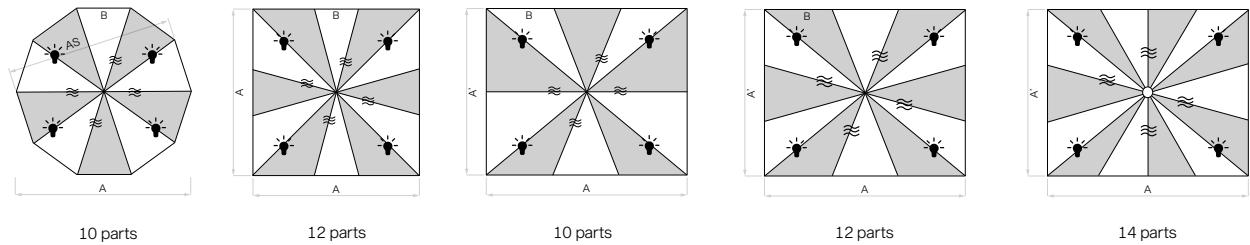

Nominal size	Lateral distance	Mast Ø	Area covered	Crank height	Height closed/with flounce	Clear headroom/with flounce	Total height	Height open	Foundation	Minimum weight for base	¹⁰ max. wind speed open perm.
cm	cm	cm	m ²	cm	cm	cm	cm	cm	cm	kg	km/h (wind force)
A	AS	M	B	D	E'/E ²	F'/F ²	G	H	C		
Ø 700 ⁷	665	12	36	85	145/120	260/230	502	356	135×135	690	80 (9)
Ø 800 ⁷	760	12	49	85	118/93	260/230	527	369	150×150	690	70 (8)
500×500 ⁸	-	12	25	80	115/90	260/230	470	331	125×125	570	110 (11)
550×550 ⁸	-	12	30.3	80	96/71	260/230	487	338	125×125	690	100 (10)
600×600 ⁸	-	12	36	70	85/60	260/230	512	345	135×135	690	90 (10)
650×650 ⁸	-	12	42.3	70	81/56	260/230	546	364	150×150	690	85 (9)
700×700 ⁸	-	12	49	70	81/56	260/230	587	394	150×150	690	75 (9)
600×500 ⁷	-	12	30	85	90/65	260/230	482	339	125×125	570	80 (9)
700×500 ⁷	-	12	35	70	82/57	260/230	516	350	135×135	570	75 (9)
700×600 ⁸	-	12	42	70	83/58	260/230	552	373	150×150	690	75 (9)
800×400 ⁷	-	12	32	70	80/55	260/230	536	378	135×135	570	75 (9)
800×600 ⁹	-	12	48	70	80/55	260/230	598	419	150×150	690	60 (7)

⁷ 10 parts

⁸ 12 parts

⁹ 14 parts

¹⁰ 10 km/h less with flounce

The above measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5\text{ cm}$).


If a minimum or a maximum height underneath is required, this must be agreed with Glatz.

The measures of the height are determined by the M16 ground socket. If one of the offered bases is used, these measures change only slightly.

The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage. A base with the specified minimum weight is not sufficient.

In the presence of several parasols, the min. distance between one parasol and another and between parasols and walls shall be 30 cm.

Opening and closing using a battery-operated drill is not permitted.

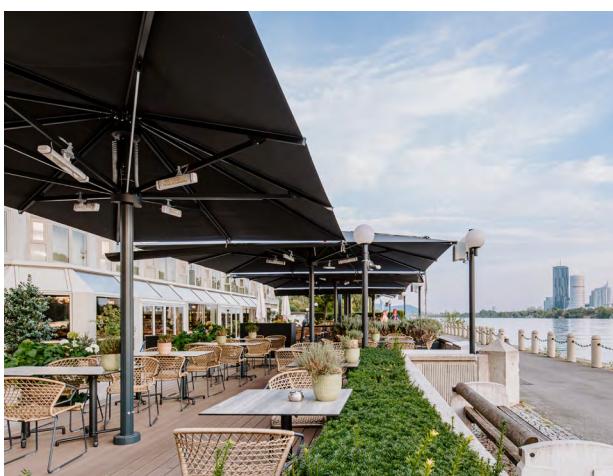

Glatz AG

+41 52 723 66 44
contract@glatz.com
glatz.com



PZS

PALAZZO® Style
The stylish parasol



Unique selling proposition

- Palazzo line design language: uniform design of the models Royal, Noblesse and Style
- Continuous mast profile down to the floor covering (internal support tube & tip-over hinge)
- Counter-rotating opening principle (with crank or motor):
Opened with just 9 turns of the crank (patented)
High closing height (no need to move the furniture)
- 110 km/h wind stability at size 300 x 300 cm
- Top quality material selection
- LED lighting system integrated into the struts
- Professional additional options (Heating, rain gutters, ...)
- Special product solutions (Sizes, frame, fabrics, ...)

Places of use

- Small area outdoors
- Terraces & rooftops
- Public spaces & parks
- Corrosive environments

Glatz *

Basic model

Frame

- 8 parts made from anodised aluminium
- Anti-rotation mast including reinforcing struts
- Mast profile Ø 105 mm and 4.5 mm wall thickness
- Roof struts 23 x 40 mm

Frame material

- Aluminium: EN-AW-6063-T66
- Screws and rivets made from stainless steel A4
- Glass-fibre reinforced plastic parts: PA6GF30
- Anodisation:
 - Profile surface finishing
 - High degree of hardness – wear resistance (“scratch-resistant”)
 - Increased corrosion resistance
 - Natural appearance (adaptation to environment)
 - Modern look (luxurious matt)

Frame colour

- Anodised natural matt (standard)
- RAL 7016 powder-coated (no surcharge)
- RAL colours powder-coated (surcharge)
 - Powder coating on anodised profiles (providing additional corrosion protection)

Opening principle

- Counter-rotating (telescopic system)
- Patented opening using a toothed belt
- Opened with just 9 turns of the crank

Drive

- With hand crank (detachable)
- With motor (surcharge)

Canopy

- With or without flounce
- Adjustable (adjustable strut extensions)
- 100 % polyacrylic approx. 300 g/m² (spun dyed)
- Replaceable or interchangeable canopies

Wind stability

- Up to 110 km/h (with fixed anchorage)
- Tested in a wind tunnel

Fixations

[More information](#)

- Bases / parasol stands / covers
- Ground sockets
- Mounting plates without or with installation height made to measure
- Mounting plates for insulation floors
- Base plates made to measure

Additional options –
Standard accessories



[More information](#)

- LED lighting system (RGBW)
- Infrared radiant heater
- Motorisation
- BUS systems / connection to the home control system
- Rain gutters
- Side walls
- Protective covers with corset lacing
- Strap systems
- Impact protection
- Anti-theft system (integrated)

Special product solutions –
Made to measure

[More information](#)

- Special sizes & intermediate measurements (increments 1 & 2)
- Mast extensions & reductions max. + 1000 mm / - 500 mm
- Frame in all RAL colours
- Glatz Green® Special fabric
- Special fabrics (third-party fabrics, PVC & flame retardant)
- Custom flounces & edging strips
- Printing & advertising print

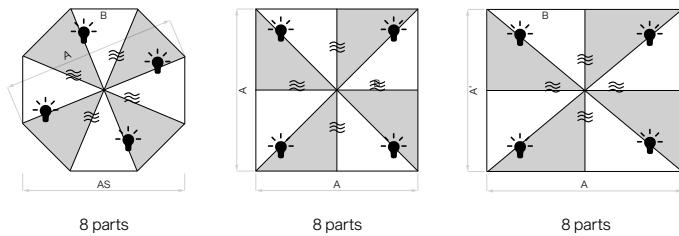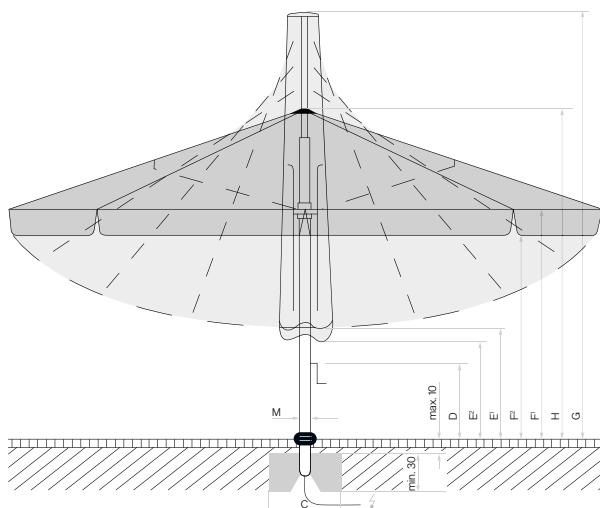

Nominal size	Lateral distance	Mast Ø	Area covered	Slide distance	Height closed/ with flounce	Clear headroom/ with flounce	Total height		Height open	Foundation	Minimum weight for base	¹⁰ max. wind speed open perm.
							F	G				
cm	cm	cm	m ²	cm	cm	cm	cm	cm	cm	cm	kg	km/h (wind force)
A	AS	M	B	D	E/F ²	F'/F ²	G	H	C			
Ø 350	325	10.5	8.7	85	179/154	235/210	356	285	80×80	180	115 (11)	
Ø 400	370	10.5	11.3	85	176/151	235/210	378	292	80×80	180	90 (10)	
Ø 450	415	10.5	14.3	85	178/153	235/210	406	299	80×80	180	75 (9)	
Ø 500	460	10.5	17.7	85	169/144	235/210	423	305	100×100	240	65 (8)	
Ø 600	554	10.5	25.5	85	136/111	235/210	442	319	120×120	310	55 (7)	
300×300	-	10.5	9	85	142/117	235/210	353	280	80×80	180	110 (11)	
350×350	-	10.5	12.3	85	124/99	235/210	371	287	100×100	240	95 (10)	
400×400	-	10.5	16	85	121/96	235/210	405	294	100×100	240	80 (9)	
450×450	-	10.5	20.3	80	103/78	235/210	422	301	100×100	310	70 (8)	
350×250	-	10.5	8.8	85	123/98	235/210	337	281	80×80	180	100 (10)	
350×300	-	10.5	10.5	85	133/108	235/210	362	284	80×80	180	95 (10)	
400×200	-	10.5	8	85	100/75	235/210	322	283	80×80	180	95 (10)	
400×300	-	10.5	12	85	117/92	235/210	366	288	80×80	180	85 (9)	
450×350	-	10.5	15.8	85	109/84	235/210	394	295	100×100	240	75 (9)	

¹⁰ 10 km/h less with flounce

The above measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5\text{ cm}$).




If a minimum or a maximum height underneath is required, this must be agreed with Glatz.

Height dimensions are based on ground socket M4. These differ slightly depending on the type of base. Except for base M4, 180 kg plus 15.5 cm.

The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage. A base with the specified minimum weight is not sufficient.

In the presence of several parasols, the min. distance between one parasol and another and between parasols and walls shall be 25 cm.

Opening and closing using a battery-operated drill is not permitted.

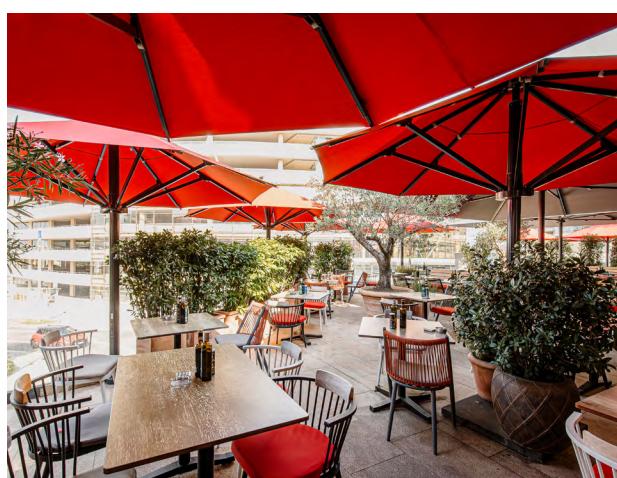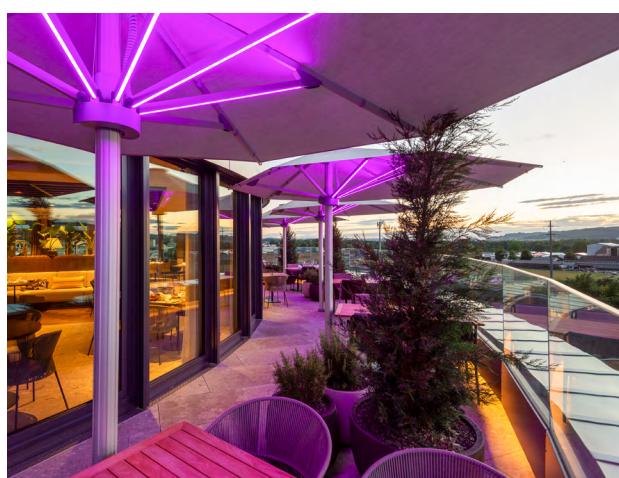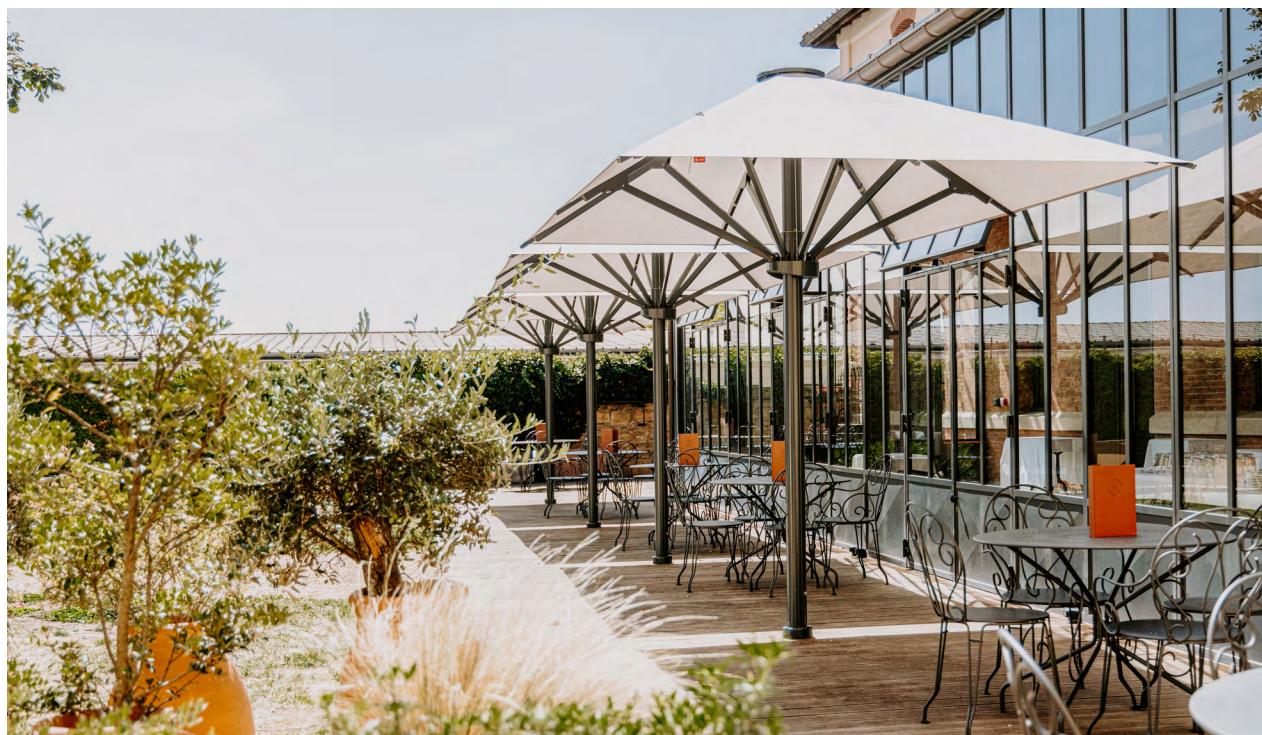

Glatz AG

+41 52 723 66 44
contract@glatz.com
glatz.com

