

[atriadesigns.ca](http://atriadesigns.ca)



premier outdoor living • solar shading • cladding products

(604) 428 1818  
[sales@atriadesigns.ca](mailto:sales@atriadesigns.ca)

FORTINO® Riviera

The compact windproof parasol



Glatz 

## Assortment


	Nominal size without flounce	Number of ribs	Order no. Frame anodised natural
cm			
○	Ø 250	8 parts	311 00 250 171
	Ø 300	8 parts	311 00 300 171
□			
	200×200	8 parts	311 00 201 171
	240×240	8 parts	311 00 241 171

Nominal size	Lateral distance	Pole Ø	Area covered	Height closed	Clear headroom	Total height	Height open	Foundation	Minimum weight for base	max. wind speed open perm.
cm	cm	cm	m <sup>2</sup>	cm	cm	cm	cm	cm	kg	km/h (wind force)
<b>A</b>	<b>AS</b>	<b>M</b>	<b>B</b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>H</b>	<b>C</b>		
Ø 250	230	3.8	4.4	150	205	285	240	60×60	40	80 (9)
Ø 300	275	3.8	6.4	140	205	300	245	70×70	55	60 (7)
200×200	-	3.8	4.0	135	205	285	240	60×60	40	70 (8)
240×240	-	3.8	5.8	115	205	295	245	70×70	55	60 (7)

The listed measures represent extrapolated average values that may be slightly different on the product ( $\pm 2\% \pm 5\text{ cm}$ ).

Height dimensions are based on ground socket BT. These vary slightly depending on the type of base. Except for steel base minus 5 cm.

The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage. A base with the specified minimum weight is not sufficient. In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.

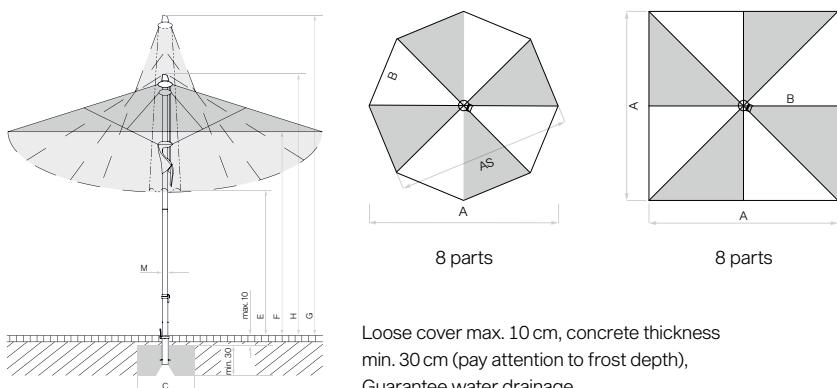

## Accessories

		Absolutely necessary	Order no.
<b>Protective cover made of coated, tear-resistant polyester fabric</b>			
1	Protective cover with zip and rod		350 01 609 980
	10 pieces, protective cover with zip and rod		350 01 609 974
<b>Electrical accessories</b>			
2	OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger		350 01 563 000
3	OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger		350 01 563 100
<b>Fixations</b>			
<b>Ground sockets</b>			
4	Ground socket BT, hot-dip galvanised steel	Connection tube BT	350 01 206 100
<b>Wall consoles</b>			
5	Wall bracket Z, 180 mm, hot-dip galvanised steel	Support tube Z	350 01 205 000
<b>Bases</b>			
6	Concrete base Z, 40 kg, Ø 60×8.5 cm, light concrete	Support tube Z	350 01 111 116
	1 pallet (20 pieces) concrete base Z, 40 kg, Ø 60×8.5 cm, light concrete	Support tube Z	350 01 112 116
6 <sup>1</sup>	Concrete base Z, 40 kg, Ø 60×8.5 cm	Support tube Z	350 01 109 529
6	Concrete base Z, 55 kg, Ø 60×11 cm, light concrete	Support tube Z	350 01 111 216
	1 pallet (20 pieces) concrete base Z, 55 kg, Ø 60×11 cm, light concrete	Support tube Z	350 01 112 216
7	Natural granite base Z, 40 kg, 50×50×8 cm, natural stone. Available from approx. March 2025. <b>NEW</b>	Support tube Z	350 01 109 467
7	Natural granite base Z, 55 kg, 59×59×8 cm, natural stone. Available from approx. March 2025. <b>NEW</b>	Support tube Z	350 01 109 447
8	<sup>3</sup> Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, galvanised steel <b>NEW</b>		350 01 109 487
8	<sup>3,8</sup> Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, high-grade steel 1.4301 / 304 <b>NEW</b>		350 01 109 486
9	Steel base Z 40 kg, 58.5×58.5×2 cm, hot-dip galvanised steel	Support tube Z	350 01 100 810
9	Steel base Z 55 kg, 68.5×68.5×2 cm, hot-dip galvanised steel	Support tube Z	350 01 100 910
10	<sup>3</sup> Set of castors for steel base Z, 40/55 kg, Ø 5 cm, galvanised steel Available from approx. february 2025. <b>NEW</b>		350 01 101 001
10	<sup>3,8</sup> Set of castors for steel base Z, 40/55 kg, Ø 5 cm, high-grade steel 1.4301 / 304 <b>NEW</b>		350 01 101 000
<b>Bases with castors</b>			
11 <sup>1,3</sup>	Natural granite base Z, 40 kg, 45×45×8 cm, natural stone, with castors and retractable handle	Support tube Z	350 01 109 465
11 <sup>1,3</sup>	Natural granite base Z, 55 kg, 55×55×9 cm, natural stone, with castors and retractable handle	Support tube Z	350 01 109 445
12 <sup>3,7</sup>	Base with castors Z, 55 kg, 65×65×11 cm, light concrete (without decorative plate)	Support tube Z + decorative plate	350 01 113 200
	<sup>3,7</sup> 1 pallet (5 pieces) base with castors Z, 55 kg, 65×65×11 cm, light concrete (without decorative plate)	Support tube Z + decorative plate	350 01 113 280
13	Decorative plate in grey white RAL 9002 for base with castors Z, 55 kg, aluminium composite		350 01 113 310
14	Decorative plate in anthracite RAL 7016 for base with castors Z, 55 kg, aluminium composite		350 01 113 320
<b>Various fixation types</b>			
15	Lawn spike Z, 85×150×350 mm, hot-dip galvanised steel	Support tube Z	350 01 205 400
<b>Support tubes/Connection tubes</b>			
16	Support tube Z, Ø 35 / 38–39 mm, hot-dip galvanised steel		350 01 201 010
16	Support tube Z, Ø 35 / 38–39 mm, high-grade steel 1.4301 / 304		350 01 201 100
17	Connection tube BT, Ø 35 / 38–39 mm, hot-dip galvanised steel		350 01 206 210

<sup>1</sup> while stocks last

<sup>3</sup> only suitable for smooth, joint free surface coverings

<sup>7</sup> 55 kg: Ground clearance 7 mm

<sup>8</sup> suitable for corrosive environments


**Frame**

8 parts  
 Two-part profiled pole 38.4 x 2 mm  
 Opposite opening principle for easy opening  
 Quick and easy operation thanks to tensioning lever  
 Corrosion-resistant frame made of natural anodised aluminium with high-quality, fibreglass-reinforced plastic parts, stainless-steel screws and rivets  
 Canopy self-tensing through flexible rib ends  
 Frame roof: round, square

**Frame colour**

Aluminium, anodised

**Canopy**

Fabric Quality 5: polyacrylic, 300 g/m<sup>2</sup>, UV protection > 98%  
 Fabric Quality 4: polyester, 250 g/m<sup>2</sup>, UV protection > 98%  
 Fabric Quality 2: polyester, 220 g/m<sup>2</sup>, UV protection > 98%

**Flounce**

Only available without

**Protective cover**

Can be ordered as an optional extra

**Electrical accessories**

Osyrion Spot LED with integrated battery pack



Usage locations



Type of fastening



FORTINO® Riviera,  
 ® Int. Design reg.

Valid from 1.1.2025  
[glatz.com](http://glatz.com)