



atriadesigns.ca
604-428-1818
sales@atriadesigns.ca

ALEXO®

The classic parasol since 1931




Glatz 

ALEXO®



Frame	10 parts Pole Ø 30 mm Gear joint made from nickel-plated brass Ribs made from flexible, break-proof fibreglass Function: Tilttable to 90° Frame roof: round
Frame colour	Swiss ash with a clear varnish
Canopy	Fabric quality 5: polyacrylic, 300 g/m ² , UV protection > 98 % Fabric quality 4: polyester, 250 g/m ² , UV protection > 98 %
Flounce	Available with or without The material on the version without flounce is reinforced with leather edges
Protective cover	Can be ordered as an optional extra



Using Locations



Fixations



Assortment

	Nominal size	Number of ribs	Order no. without flounce	Order no. with flounce
○	cm			
	Ø 200	10 parts	180 00 200 751	180 00 200 750
	Ø 220	10 parts	180 00 220 751	180 00 220 750


Nominal size	Lateral distance	Pole Ø	Area covered	Height closed/ with flounce	Clear headroom/ with flounce	Total height	Foundation	Minimum weight for base	max. wind speed open perm.
cm	cm	cm	m ²	cm	cm	cm	cm	kg	km/h (wind force)
A	AS	M	B	E¹/E²	F¹/F²	G	C		
Ø 200	190	3.0	2.9	135/ 125	215/ 200	245	40 × 40	30	20 (4)
Ø 220	210	3.0	3.6	125/ 115	210/ 195	245	40 × 40	30	20 (4)

The listed measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5$ cm).


The measures of the height are determined by the ST ground socket. If one of the offered bases is used, these measures change only slightly. Apart from the steel base minus 5 cm.

The max. wind speed limits as per our separate sheet apply only if the parasol canopy is in a horizontal position and if there is a fix ground anchorage.

In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.



Loose cover max. 10 cm, concrete thickness min. 30 cm (pay attention to frost depth), Guarantee water drainage



Accessories

Absolutely
necessary

Order no.

Protective cover made of coated, tear-resistant polyester fabric

1	Protective cover		350 01 609 983
---	------------------	--	----------------

Electrical accessories

2	OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger		350 01 563 000
3	OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger		350 01 563 100

Fixations

Ground sockets

4	Ground socket ST, galvanised steel	Tubo de paso ST	350 01 205 105
---	------------------------------------	-----------------	----------------

Wall consoles

5	Wall bracket Z, 180 mm, galvanised steel	Tubo de fijación Z	350 01 205 000
---	--	--------------------	----------------

Bases

6	Concrete base Z, 30 kg, Ø 47×8.5 cm	Tubo de fijación Z	350 01 109 532
6	Concrete base Z, 40 kg, Ø 60×8.5 cm	Tubo de fijación Z	350 01 109 529
7	Steel base Z 40 kg, 58.5×58.5×2 cm, galvanised steel	Tubo de fijación Z	350 01 100 210
8	³ Natural granite base Z, 40 kg, 45×45×8 cm, natural stone, with castors and retractable handle	Tubo de fijación Z	350 01 109 465
8	³ Natural granite base Z, 55 kg, 55×55×9 cm, natural stone, with castors and retractable handle	Tubo de fijación Z	350 01 109 445


Support tubes/transition tubes

9	Support tube Z, Ø 25–33 mm, galvanised steel		350 01 200 135
10	Connection tube ST, Ø 25–33 mm, galvanised steel		350 01 205 100

Various fixation types

11	Lawn spike Z, 85×150×350 mm, galvanised steel	Tubo de fijación Z	350 01 205 400
----	---	--------------------	----------------

³ only suitable for smooth, joint free surface coverings

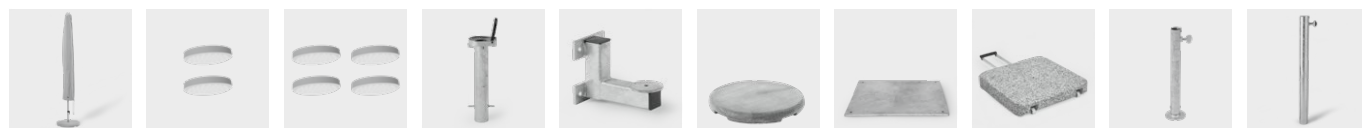

1

2

3

4

5

6

7

8

9

10



11





Glatz AG
Parasols
2023 Season

[glatz.com](https://www.glatz.com)

