

atriadesigns.ca



premier outdoor living • solar shading • cladding products

(604) 428 1818

sales@atriadesigns.ca

CAMARGUE®

PRODUCT INFORMATION



EN - 12/24

 **RENSON®**

TABLE OF CONTENTS

Description	3
Benefits	4
Design	4
Quality	5
Customisation	6
Comfort	6
Technical details	7
Standard configuration	8
Camargue weight	10
Camargue snow load	11
Accessoires	12
Certificates & testing	14
configuration	15
Type	15
Construction method	19
Columns	21
Comfort Pack	23
Profiles	24
Waterproof wall mounting	25
Blade orientation	26
Mounting bases	27
Water drainage	29
Other tools	30




DESCRIPTION




Modular aluminium patio cover with rotating blades and integrated side elements.

- Can be controlled using the Renson® Connect App, io or RTS
- Modular support structure
- Integrated side elements and accessories
- Can be joined in multiple parts on both the span and pivot side, even after first installation



BENEFITS

Design

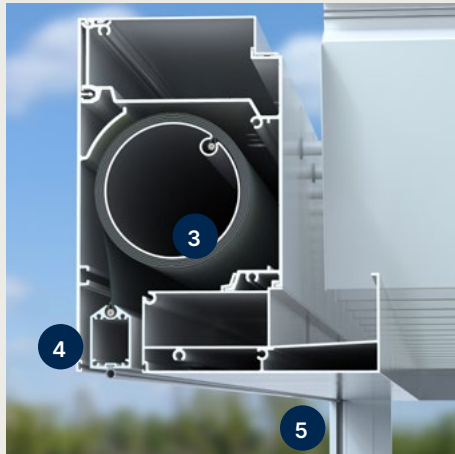

1 MODULAR DESIGN

Expandable to include multiple roof sections, even after initial installation. The structure can be endlessly expanded on both the span and pivot side to cover large surface areas.

2 INVISIBLE SCREWS

Create an elegant and sleek structure

3 THE FABRIC ROLLER TUBE IS FULLY INTEGRATED INTO THE STRUCTURE

INNOVATION


No visible screen head box disrupting the aesthetic

4 THE BOTTOM BAR DISAPPEARS INTO THE HEAD BOX

5 FIXSCREEN SIDE GUIDING CHANNELS ARE INTEGRATED INTO THE COLUMNS

INNOVATION

Full aesthetic integration with the Camargue structure

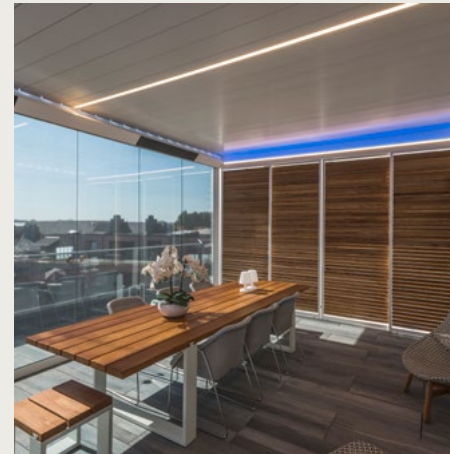


6 MINIMAL GAPS BETWEEN THE BLADES

Lend a stunning and sleek finish

7 INTEGRATED MOTOR

Forms a stunning minimalist design, without a motor disrupting the aesthetic.

Quality

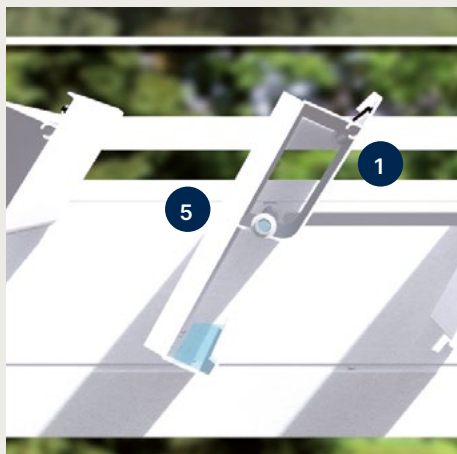

1 DOUBLE-WALLED BLADES FOR EXTRA STRENGTH

Load-bearing capacity: 200 kg/m²

2 F2 TECHNOLOGY

INNOVATION

With a span system that ensures the rigidity of its support structure, Camargue remains stable even in strong winds (pivot ≥ 4.5 metres)


3 UNIQUE END CAPS

Provide a solid corner connection and perfect water drainage

4 NO HOLES IN THE WATER CHANNEL

An additional chamber means no holes need to be drilled in the water channel when affixing side infills

5 WELDED ALUMINIUM DRIPS, POWDER-COATED TO MATCH THE BLADE COLOUR

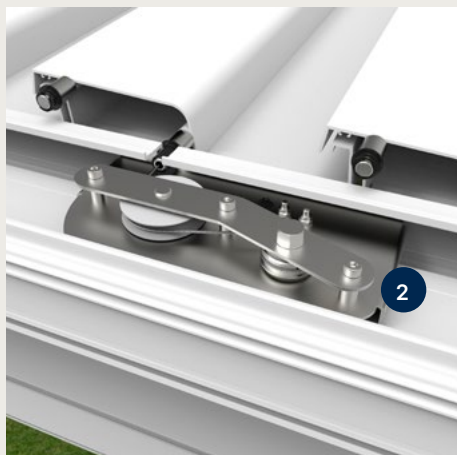


6 INTEGRATED WATER DRAINAGE WITH LARGE FLOW

Through the wide blade gutters, water flows towards gutters with diffusers to prevent splashing before being drained via PVC drainpipes integrated into the columns.

7 RIGID STRUCTURE

Span system lends rigidity to the support structure

Customisation

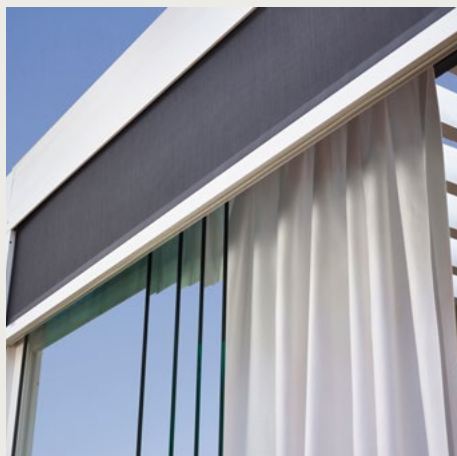


1 WIDEST RANGE OF SIDE INFILLS

2 BACK ORDERS POSSIBLE

3 ACCESSORIES

For more information about the possible accessories, see the 'Accessories' section and/or the product information for the various accessories.

Comfort

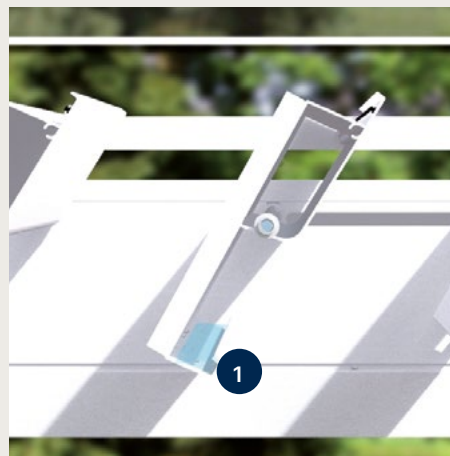

1 SPECIALLY DEVELOPED GUTTER BORDER

INNOVATION

Prevents the patio and furniture from getting wet when the blades are opened after a rain shower

2 SILENT AND SOFT CLOSING MECHANISM

By adding a brush to the blades

3 QUICK INSTALLATION

Thanks to maximum pre-assembly and the modular structure of the various junctions

4 MAXIMUM NATURAL LIGHT

Blades open up to 150°

TECHNICAL DETAILS



Dimensions	
Span	Min. 1800* mm - max. 4500 mm
Pivot	Min. 1800* - max. 6200 mm / 7060 mm**
Passage height	Min. 415 mm - max. 2800 mm
Total height with blades closed	Passage height + 260 mm
Total height with blades 90° open	Passage height + 355 mm
Minimum height required when installed under a roof overhang	Passage height + 365 mm
Blade rotation	Max. 150°
Minimum number of water drainage points < 16 m²	1
Minimum number of water drainage points > 16 m²	2***
Operating methods	
Renson® Connect App	✓
Somfy io	✓
Somfy RTS	✓
Home automation ready	✓

* Smaller dimensions (span min. 500 mm and pivot min. 1256 mm) possible by special request to pre-sales - drawing office

** Pivot > 6200 mm possible subject to a number of conditions. See the "Camargue > 6200 mm".

*** Please note: If only one column is used, the water drainage capacity will be limited to 0.025 l/m².s (90 l/h)

Electrical bladed roof drive

Parameters	Value
Supply voltage	230 Volt AC, 50 Hz
Transformer current range	0 – 2.5 Ampère
Transformer power	100 W
Motor voltage	24 Volt DC
Motor nominal current	3 Ampère
Protection rating	IP 66 Dynamic
Maximum running time with continuous use	Approx. 2 minutes
Automatic	16 A curve C



Standard configuration

Structure


- Free-standing or façade mounted (against whole wall or partial connection)
- Standard mounting bases (visible, invisible or cast)
- Custom span, pivot and passage height with mm precision
- Motor drive with choice of motor position
- Blade orientation (sun protection or maximum sunlight)

Finish

- Seaside Quality A
- Monocolour or dual colour according to Renson® standard colours
- Integrated water drainage (incl. PVC drainage pipes and anti-splash diffusers in the gutter)
- Adjustable installation and drainage holes

Camargue > 6200 mm

- Maximum pivot dimension: 7060 mm
- Maximum span dimension: 4000 mm (once pivot length is greater than 6200 mm)
- Number of columns per free-standing pivot side: minimum three.
- Maximum free space between two columns: 5900 mm
- Shifted column: NOT possible
- Join on the pivot side to obtain a longer span: NOT possible
- Join on the span side to obtain a longer pivot: IS possible
- Minimum number of water drainage points: three, of which two on the lowest side
- Heat & Sound Beam: NOT possible on the pivot side
- Maximum number of Led blades: 3
- Maximum number of glass blades: 5
- Maximum number of Lineo Fix / Heat blades: 4

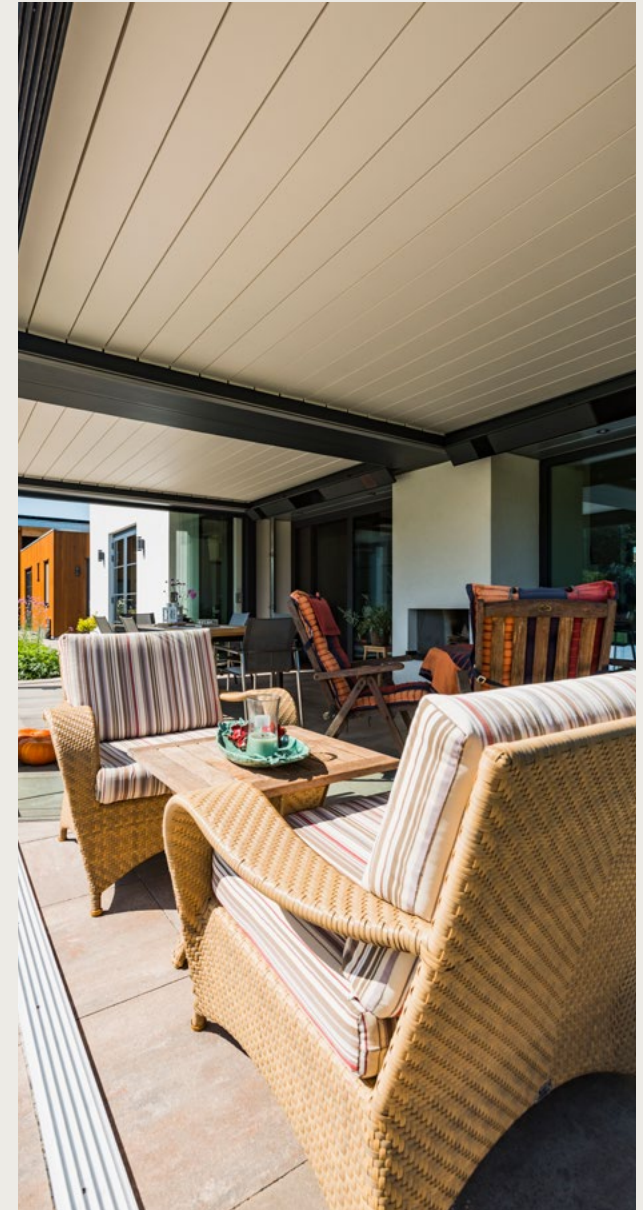

Camargue weight

Total weight (kg) of entire Camargue																
Pivot	Span															
	Dimensions in mm	# blades	2000	2200	2400	2600	2800	3000	3200	3400	3600	3800	4000	4200	4400	4500
	2760	10	245	256	266	277	288	299	310	320	331	342	353	364	374	380
	2975	11	255	266	278	289	300	312	323	335	346	357	369	380	392	397
	3190	12	265	277	289	301	313	325	337	349	361	373	385	397	409	415
	3405	13	274	287	300	312	325	338	350	363	376	388	401	414	426	433
	3620	14	284	298	311	324	337	351	364	377	391	404	417	430	444	450
	3835	15	294	308	322	336	350	364	378	392	405	419	433	447	461	468
	4050	16	304	319	333	348	362	377	391	406	420	435	449	464	478	486
	4265	17	314	329	344	359	375	390	405	420	435	450	465	480	496	503
	4480	18	324	340	355	371	387	403	418	434	450	466	481	497	513	521
	4695	19	334	350	367	383	399	416	432	448	465	481	498	514	530	538
	4910	20	344	361	378	395	412	429	446	463	480	497	514	531	548	556
	5125	21	354	371	389	406	424	442	459	477	494	512	530	547	565	574
	5340	22	363	382	400	418	436	455	473	491	509	528	546	564	582	591
	5555	23	373	392	411	430	449	468	486	505	524	543	562	581	600	609
	5770	24	383	403	422	442	461	481	500	519	539	558	578	597	617	627
	5985	25	393	413	433	453	473	494	514	534	554	574	594	614	634	644
	6200	26	403	424	444	465	486	506	527	548	569	589	610	631	652	662
	6415	27	413	434	455	477	498	519	541	562	583	605	626			
	6630	28	423	445	467	489	511	532	554	576	598	620	642			
	6845	29	433	455	478	500	523	545	568	591	613	636	658			
	7060	30	442	466	489	512	535	558	582	605	628	651	674			

The table above shows the weight of the frame; the weight of the columns and mounting bases is not included. Each column in the configuration adds an extra weight of 5.7 kg/column metre.

Standard mounting base weight

- invisible mounting base: 2050 g
- cast mounting base: 3590 g
- visible mounting base: 4450 g
- visible (corner): 3085 g

Reinforced mounting base weight

- invisible mounting base: 7240 g
- visible mounting base: 11285 g
- visible (corner): 9010 g

Camargue snow load

Maximum snow load Camargue (kg/m²)												
Pivot	Span											
	Dimensions in mm	2000	2250	2500	2750	3000	3250	3500	3750	4000	4250	4500
	4000	866	563	385	273	199	149	113	87	68	53	41
	4250	866	563	385	273	199	149	113	87	68	53	41
	4500	866	563	385	273	199	149	113	87	68	53	41
	4750	862	563	385	273	199	149	113	87	68	53	41
	5000	727	563	385	273	199	149	113	87	68	53	41
	5250	619	536	385	273	199	149	113	87	68	53	41
	5500	530	459	385	273	199	149	113	87	68	53	41
	5750	457	395	348	273	199	149	113	87	68	53	41
	6000	396	342	301	268	199	149	113	87	68	53	41
	6200	354	306	269	240	199	149	113	87	68	53	41



ACCESSOIRES



Camargue® - Accessoires

Comfort pack		Back order
Fixscreen + Lineo Led	-	-
Side infills		
Integrated Fixscreen	✓	✓
Algarve Fixscreen	-	-
Lapure Fixscreen	-	-
Triangle	-	-
Loggia sliding panels	✓	✓
Loggiascreen Canvas sliding door	✓	✓
Glass sliding panels*	✓	✓
Linus wall*	✓	✓
Linarte wall*	✓	✓
Outdoor curtains	✓	✓
Comfort Lighting		
Lineo Led	✓	✓
UpDown Led	✓	✓
Colomno Led	✓	-
Lapure Led	-	-
Comfort and design		
Beam Heat & Sound	✓	✓
Lineo Luce	✓	✓
Lineo Fix	✓	✓
Lineo Heat	✓	✓
Waterproof wall mounting	✓	-
Protecto protective profile	✓	✓
Automation		
Wind sensor	✓	✓
Rain sensor	✓	✓
Sun sensor	-	-

* subject to use of reinforced mounting bases on adjacent columns

Styling		Back order
Classic Line	-	-
Wooddesign roof blades	✓	✓
Columns		
Extra column	✓	-
Shifted column	✓	-
Adjustable wall column	✓	-



CERTIFICATES & TESTING

CE – DoP documents

- CE / UKCA / DoC / DoP / ETA
- EUROCODE CALCULATIONS / abZ*

Certificates

- Miami Dade – NOA
- UL / ETL certificate US – Canada / CCC
- REACH / seaside/coastal powder coating guarantee
- RoHS / AluEco
- VMRG sun protection

Declarations

- Declaration of material codes
- Declaration of testing – overview
- Declaration of powder coating
- Declaration of anodisation layer thickness
- Declaration of glass properties
- Declaration of fire resistance / reaction
- Declaration of endurance cycles
- Declaration of safety resistance water pocket
- Declaration of electrical safety
- Declaration of UV resistance / gtot + others
- Declaration of asbestos

Test reports – calculations

- Water testing / sand resistance test / IP test
- Cycle testing
- Wind (load) testing / verification certificate
- Static load test / calculation
- Environmental statement (recycled aluminium)
- Anchoring requirements
- Gravity-wind load deflection & structural test
- Wind resistance, air flow of the blades

Wind guarantee of roof with blades closed	up to 160 km/h
Wind guarantee of roof with blades open	/**
Fixscreen wind guarantee when closed	up to 60 km/h
Max. wind speed for roof or Fixscreen operation	up to 50 km/h
Water drainage flow	150 l/m ² /h
Load-bearing capacity	200 kg/m ²

* abZ: for Linarte infill


** We recommend against opening the blades in high winds > 50 km/h, as there is a risk that the blades may start vibrating and operating the blades is only permitted up to 50 km/h.




CONFIGURATION

Type


Single

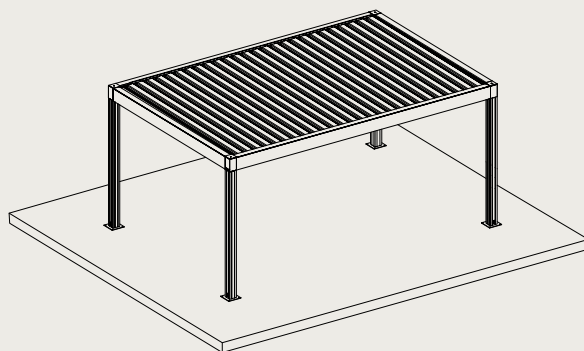


Free-standing

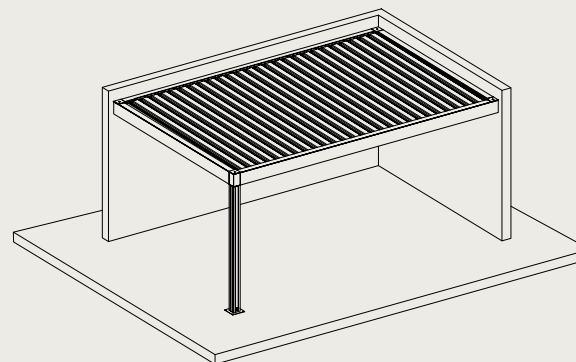

Façade-mounted on span and pivot side

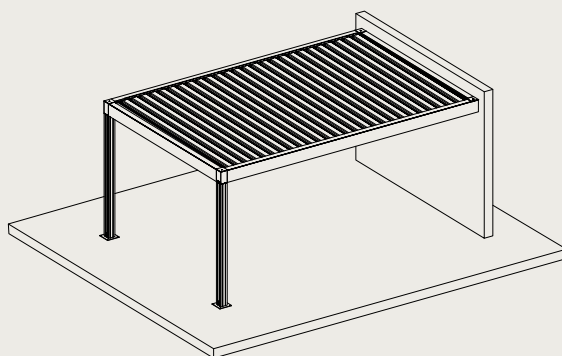


Façade-mounted on span side

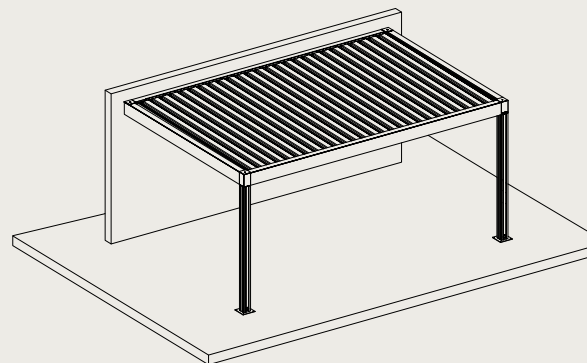

Façade-mounted on pivot side


Two sections joined on pivot side

Free-standing




Two roof sections + six columns

Façade-mounted span

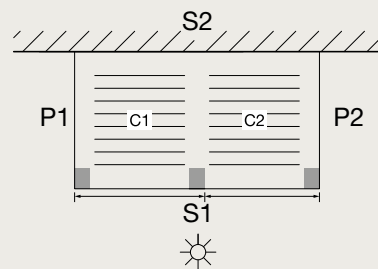

Two roof sections + three columns


Façade-mounted pivot

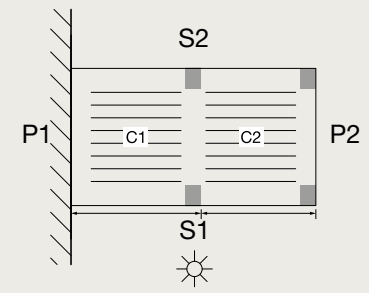

Two roof sections + four columns


Three sections joined on pivot side

Free-standing

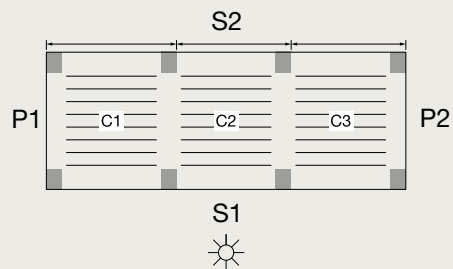


Three roof sections + eight columns

Façade-mounted span

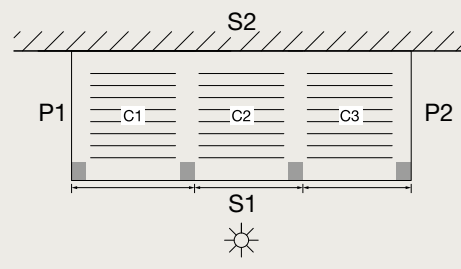

Three roof sections + four columns


Façade-mounted pivot

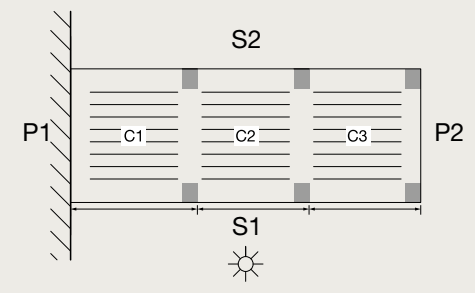

Three roof sections + six columns


Two sections joined on span side

Free-standing

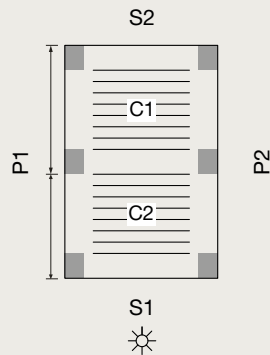


Two roof sections + six columns

Façade-mounted span

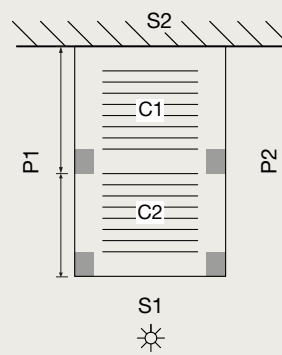

Two roof sections + four columns


Façade-mounted pivot

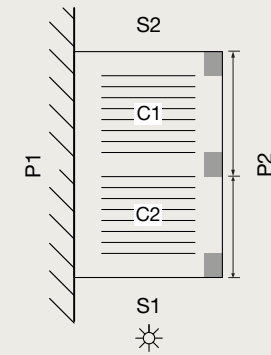

Two roof sections + three columns


Three sections joined on span side

Free-standing

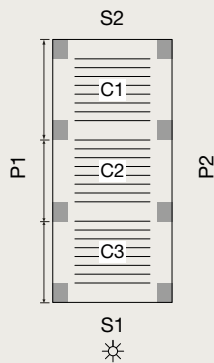


Three roof sections + eight columns

Façade-mounted span

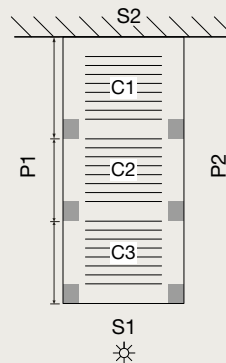



Three roof sections + six columns

Façade-mounted pivot

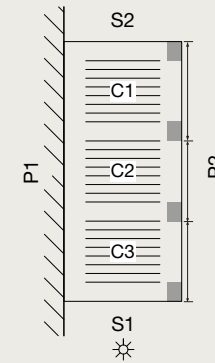



Three roof sections + four columns

Matrix shape

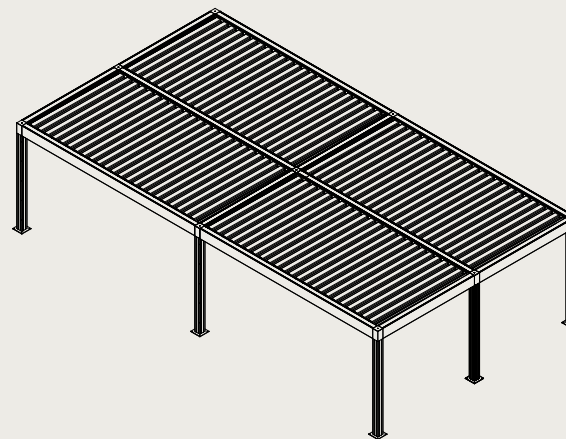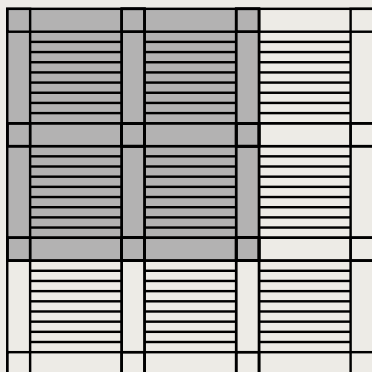

only possible via presales

L shape

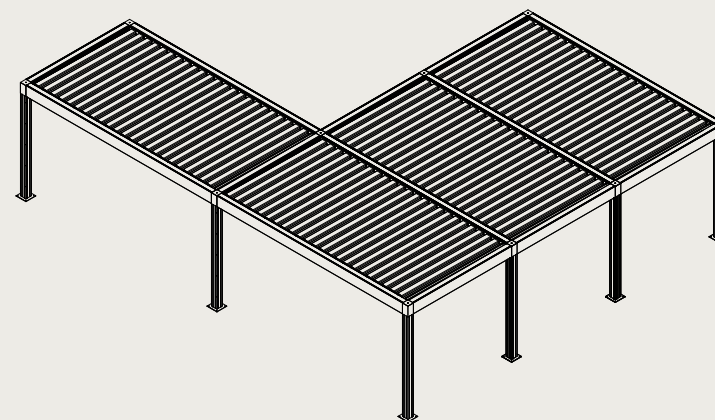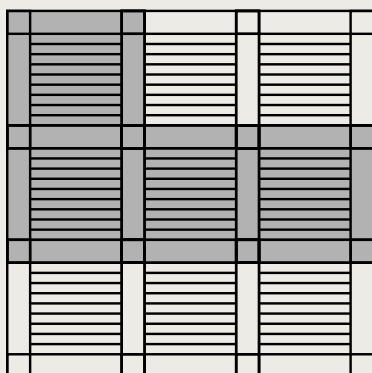


only possible via presales

Construction method



Free-standing

The sides are completely separate from any walls; the cover is not mounted against any walls.

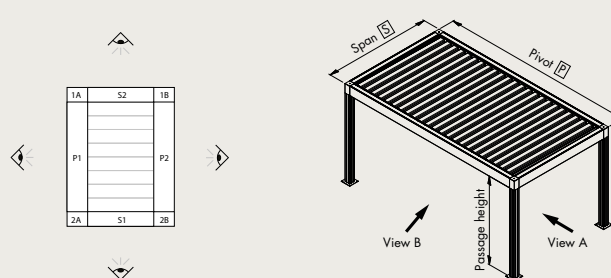


Full-length wall


The full length of the side is mounted against a wall.



*full-length wall mounted
(façade mounted) on span
side*




*full-length wall mounted
(façade mounted) on pivot side*




*full-length wall mounted
(façade mounted) on span and
pivot side*

Wall left


Only part of the side is mounted against a wall. Viewed from outside of the cover, the wall is located on the left side of the beam.



wall length




wall to the left (span)

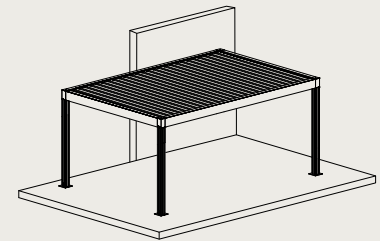


wall to the left (pivot)

Wall right


Only part of the side is mounted against a wall. Viewed from outside of the cover, the wall is located on the right side of the beam.



wall length




wall to the right (span)

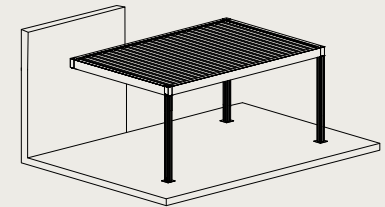


wall to the right (pivot)

Wall in the middle


A limited part of the cover is mounted against a wall. There is a free-standing section of the cover both to the left and to the right of the wall.




distance on the left to the wall



distance on the right to the wall



wall in the middle (span)



wall in the middle (pivot)

Columns

Corner column

A column is provided for each corner as standard. When installing against a wall that guarantees sufficient stability, the column on this side may be omitted.




Shifted column

A column may be shifted in the direction of the pivot to a maximum of 1/5 of the pivot length. This guarantees the stability of the construction at all times.

A shifted column in Camargue and Camargue Skye is entered by entering the required distance from the corner. It is not possible to shift a column in the span direction.

Adjustable wall column


When installing Fixscreens at a right angle to a façade, a column must be fitted. Given the fact that outside walls are not always built perfectly plumb, a visually disruptive opening may form between the wall and the column. An adjustable wall column guarantees a flush connection and compensates for an angle of 1cm to the front or 1cm to the rear.



Shorter/longer columns

A column that is longer (positive overlength) or shorter (negative overlength) than the entered passage height may be ordered.

Opting for a positive overlength can be useful to keep a roof perfectly level when your patio slopes downward, for example. Alternatively, if one of the columns is to be installed on a small wall, for example, it can be shortened (negative overlength).

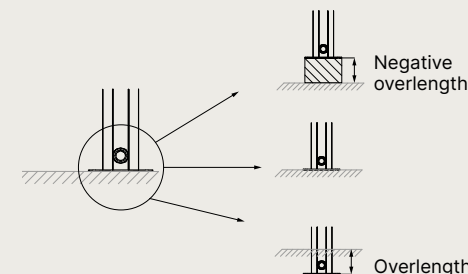



Positive overlength is possible up to the maximum passage height (2800 mm) plus 500 mm (3300 mm).

Negative overlength is possible up to the minimum passage height (= 500 mm).

Overlength only affects the price if the column length > 3000 mm.

Additional column

By adding an additional column, one side of the covering is divided into two parts. The position of the additional column is always viewed from side P1 (additional column on span) or S1 (additional column on pivot).

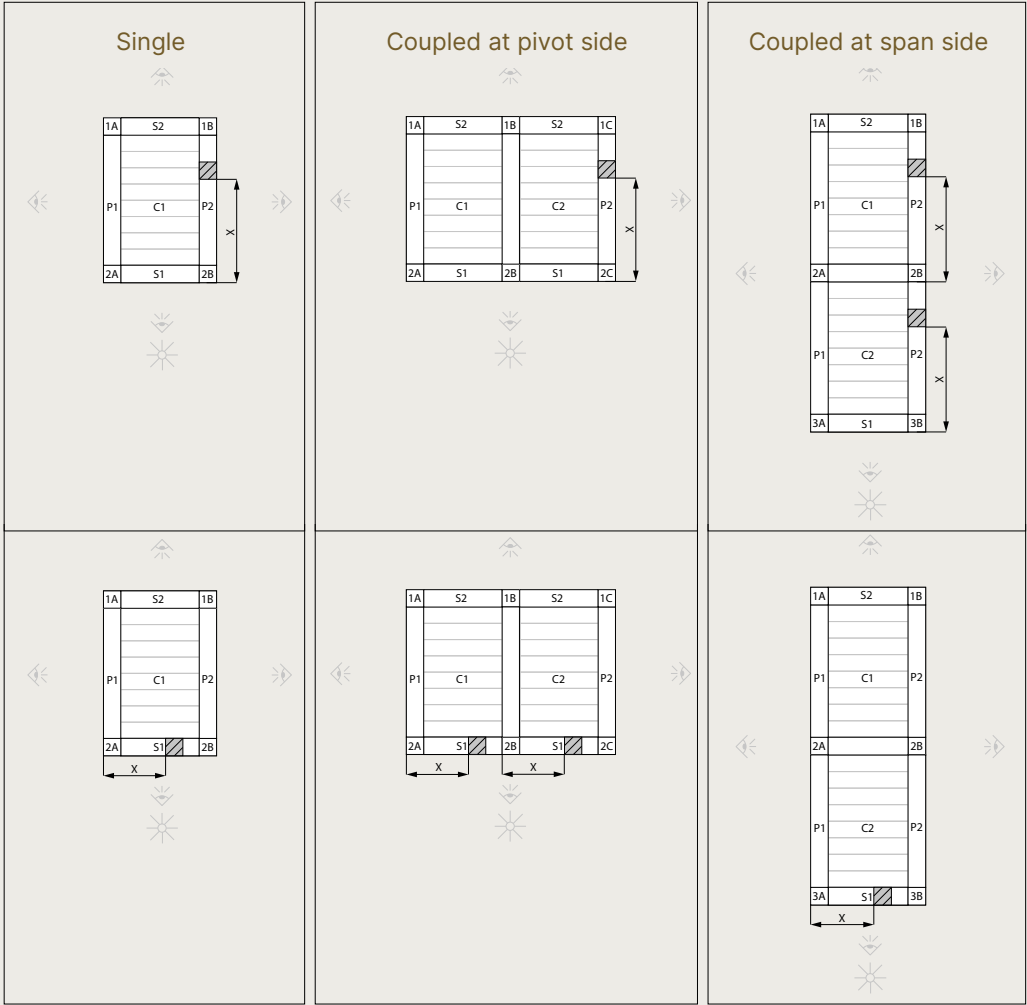

X = position of the intermediate column (mm)

Comfort Pack

Basic comfort is obtained by equipping Camargue with Fix-screens and Led lighting in the blades.









The combination of Fixscreen(s) and 2 Lineo Led blades are bundled in a package at an interesting price. This comfort pack makes it more economical to add these frequently requested accessories to Camargue.

Please note!

That this comfort pack is only available for:

- Camargue
- All dimensions
- Calculated per roof section
- Minimum 2 Lineo Leds
- Minimum 1 Fixscreen, also possible left and right of an in-between column



Profiles

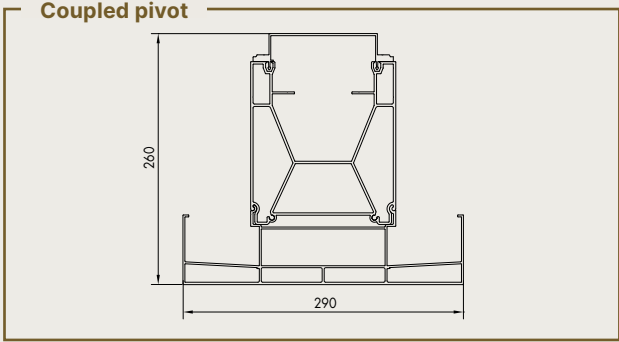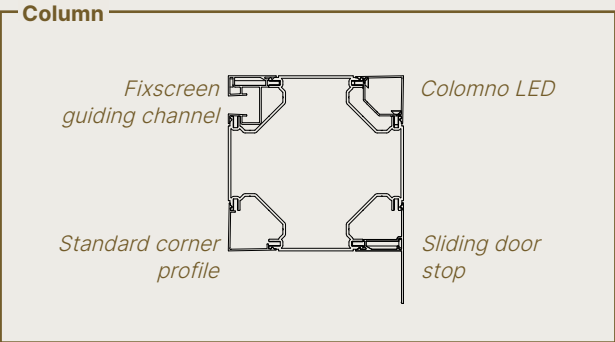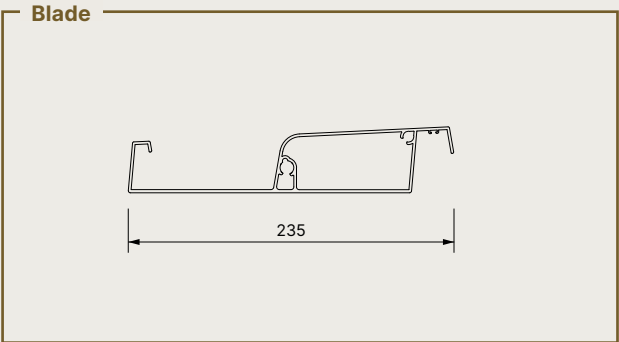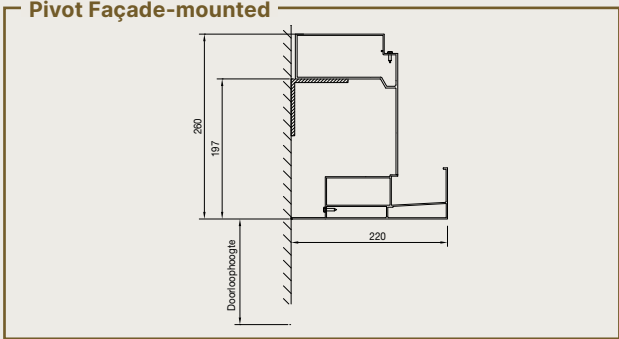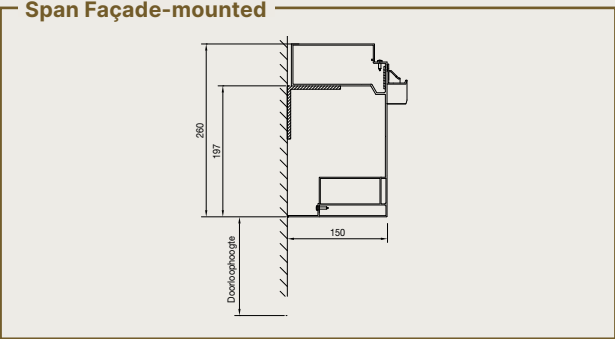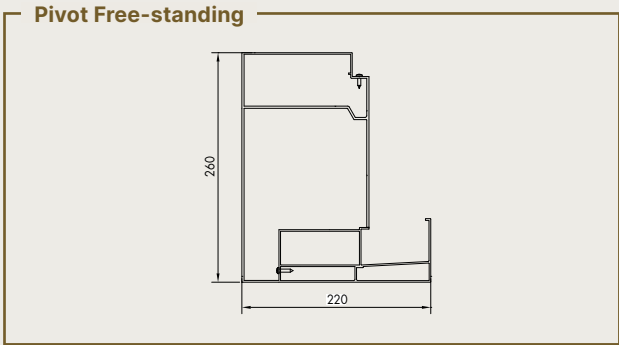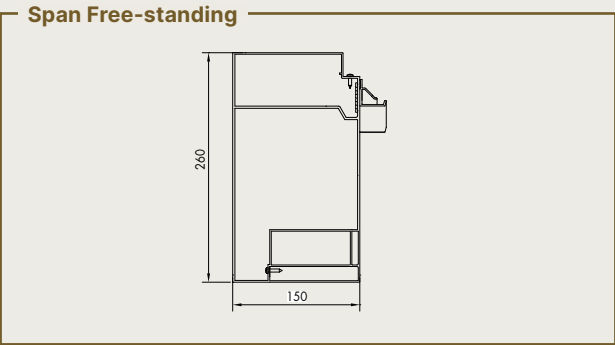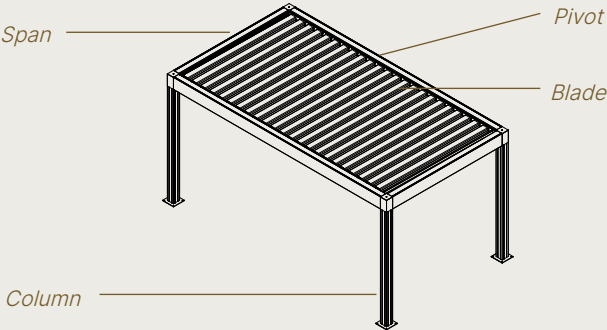



Waterproof wall mounting

This (optional) solution guarantees a waterproof connection between Camargue and the façade. This is only applicable to covers with a side fully or partially mounted against a wall, and not to free-standing covers placed against a wall.

- Prevents water seepage between the façade and Camargue
- Also sealed against powder snow
- Compensates for irregularities in the façade up to 2 cm
- Easy installation and disassembly
- Controls accessible without removing and re-applying silicone

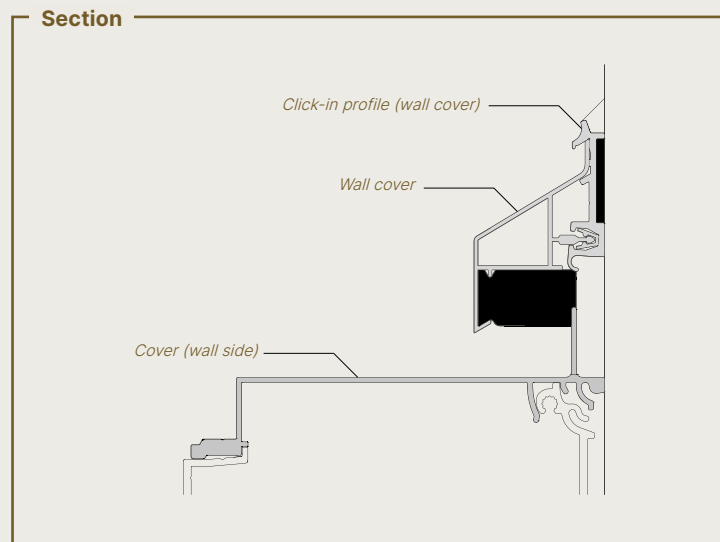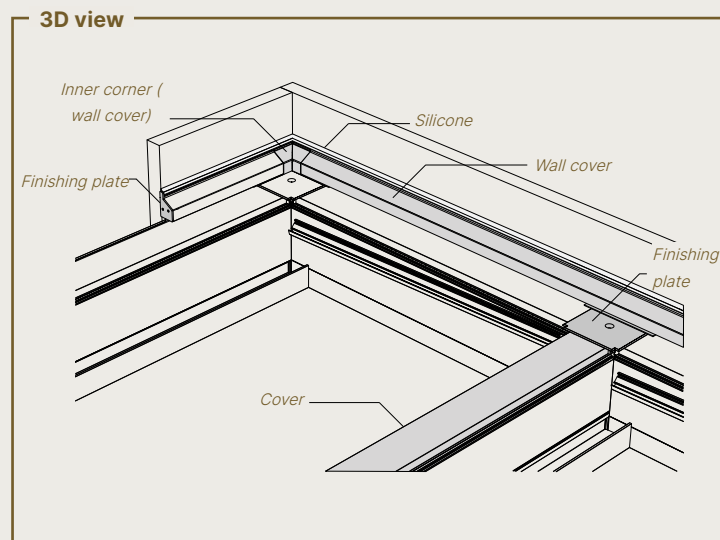

Blade orientation

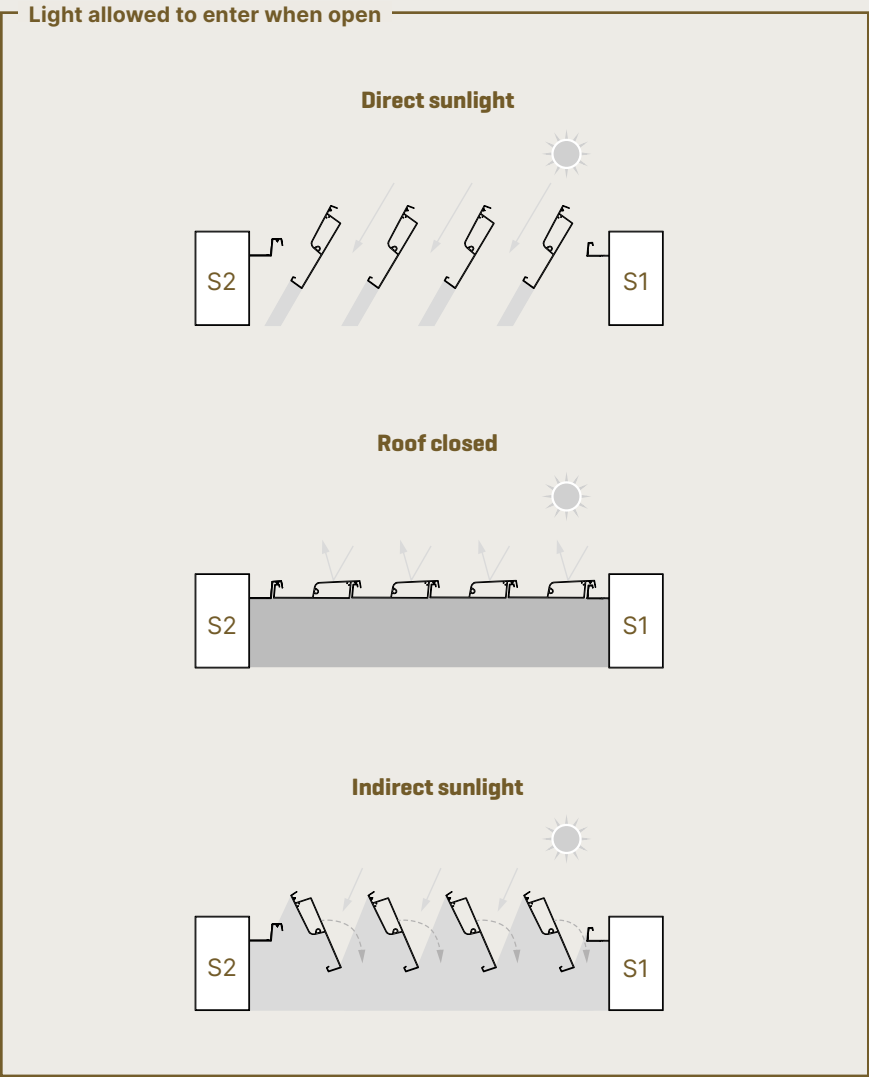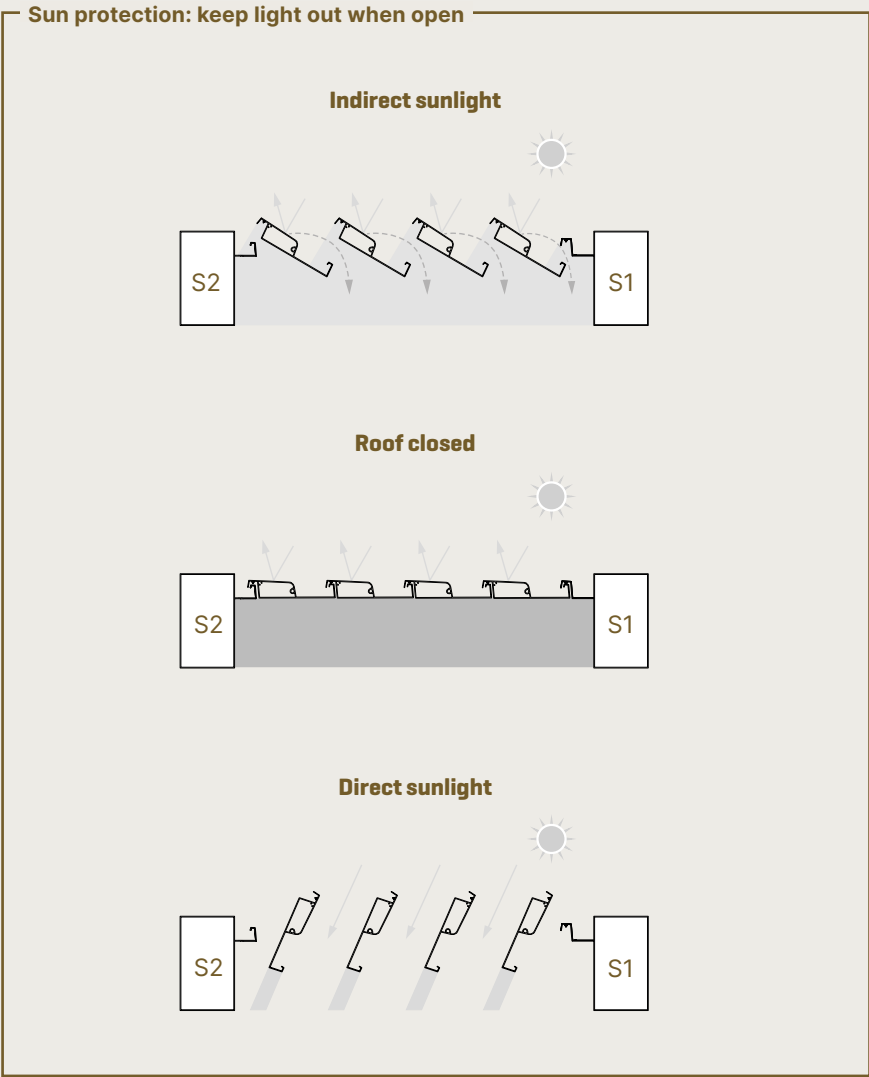


Mounting bases

The strength requirements determine whether or not reinforced mounting bases are needed.

Standard mounting bases

For use in normal circumstances, without increased wind load.

- Base plate thickness: 6 mm
- Core length: 300 mm
- Visible base plate: 270 x 270 mm

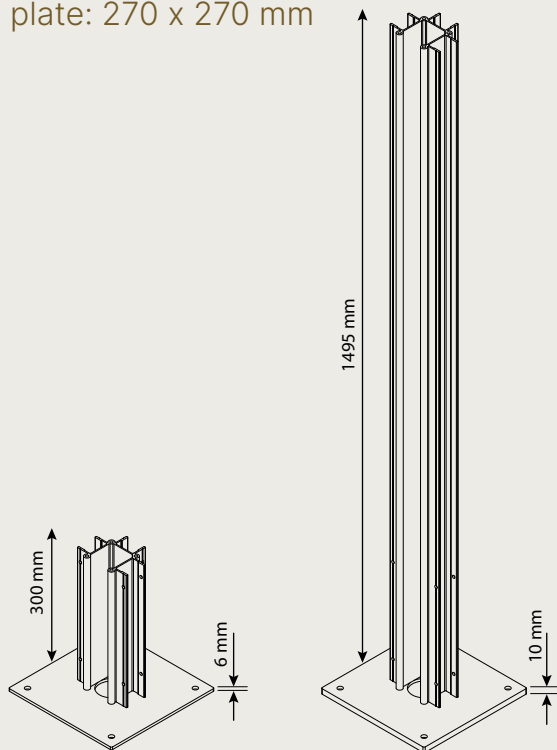


Reinforced mounting bases

At locations with increased wind loads, the cover must be equipped with reinforced mounting bases to guarantee the stability of the structure.





Examples include coastal areas, installation at a height or on a rooftop terrace.

- Base plate thickness: 10 mm
- Core length: 1495 mm
- Visible base plate: 270 x 270 mm



Mounting bases

The choice of reinforced or non-reinforced mounting bases will be made automatically based on the strength requirements and/or side infill selection. You can select a finish for your mounting bases from the possible options below.

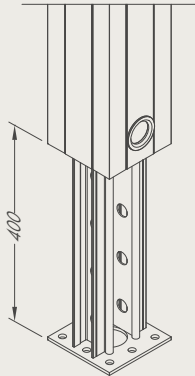					
Type	Visible mounting base		Invisible mounting base		Cast mounting base
Application	Not against a structure	Pivot or span against a structure	All applications		Cast in concrete foundation
Non-reinforced mounting base	Available at standard price				
Reinforced mounting base	Available at a surcharge				Not available

Water drainage










Water will be drained down an integrated drainpipe in the columns of your choice. Starting at 16 m², a minimum of two drainage outlets must be arranged for each roof section, of which at least one drain must be on the lowest side of the blades (not on the motor side). For all other dimensions, at least one drain must be arranged on the lowest side of the blades (not on the motor side).

Please note!

If there is only one water-draining column and the surface area is greater than 16 m², the drainage capacity of the roof will only be 90 litres per hour (0.025 L/m².s).

Three options for the height of the drainpipe:

- 66 mm relative to bottom side of the base, regardless of whether or not overlength is applicable (standard).
- 66 mm + overlength relative to the bottom side of the base. In case of overlength, you can choose to have the overlength size included in the standard distance of 66 mm. For example: an overlength of 100 mm means water drainage at 166 mm relative to the bottom side of the mounting base.
- Variable height
Minimum distance above ground level = 40 mm.
Maximum distance = passage height – 415 mm.
The height is always measured from the bottom side of the mounting base to the centre of the drainage hole.

	Passage height	Negative overlength	Positive overlength
66 mm relative to bottom side of base (standard)			
66 mm + overlength relative to bottom side of base			
Variable height (mm)			

OTHER TOOLS

Want to find out more? Visit the Professional Portal on our website (renson.net) to access the following tools.

- Technical drawings
- Training documents
- Installation manual
- User manual
- [Digital photo book & social media](#)
- ...

